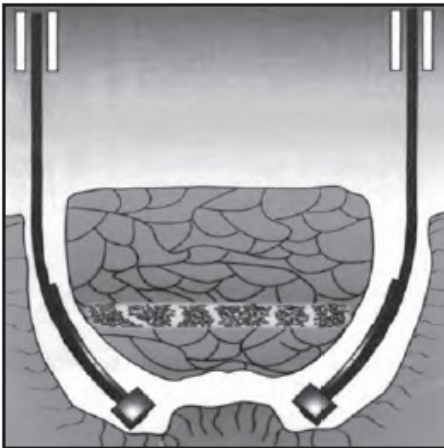






## Subsoiler for vineyards and orchards with D.A.R. type curved shares



### Complete with:

- Double frame to support shares; greatest adjustment of shares
- Support frame made of cut tube profiles sizes: 120 x 120 x 8.
- Fittings for lifting device adjustable in width for application to all tractors.
- Share support adjustable in width to adjust the working width.
- Special share safety bolt with anti-release bushing.
- Hydraulic piston for share working depth regulation.
- Smooth rear roller Ø 500 mounted on a bearing with hydraulic regulation.

Model	No. of Shares	Smooth roller Ø	Kg.	 HP	 Working depth cm.	 Working width	 Min. distance between rows
<b>DAR 140</b>	2	50	650	60-90	20-50	MIN 120	180
<b>DAR 170</b>	2	50	730	80-100	20-50	MIN 150	260







## Subsoiler for vineyards and orchards with curved shares D.A.R.-type C with fertilizer spreader



### Characteristics: see above.

- Equipped with container made of stainless steel with a load capacity of 450lt.
- With hydraulic motor to loosen the fertilizer inside the container.
- Hydraulic opening for the dosage of the product.
- Hand controller.
- It needs tractor with 6 double effect hydraulic jacks.

Model	Number of shares	Ø smooth roller	Kg.	 HP	 Working depth cm.	 Working width	 Min. distance between rows
<b>DAR 140 C with fertilizer spreader</b>	2	50	750	60-90	20-50	MIN 120	180
<b>DAR 170 C with fertilizer spreader</b>	2	50	890	80-100	20-50	MIN 150	260