



TELESCOPIC TRAILER AUTOMATIC BIN-LOADING




- Pressed steel frame 50 dm
- Load-bearing frame in squared tube
- Widening frame for bin loading
- 2 tyres 31x15.50-15 or 10.075 15.3
- Hydraulic control on the tractor for adjustments during loading


SPECIFICS


- 4 lever distributor to position on the tractor - tractor oil power with 2 double effect jags; 30 lt tractor
 - 1 lever controls the hydraulic catenary to load the bins
 - 1 lever controls the wheels (lift-lower) to tilt the frame during loading and unloading
 - 1 lever controls the hydraulic drawbar for adjustment to every terrain
 - 1 lever controls the shift of the drawbar to simplify the bin input

TELESCOPIC SUPER WITH 4 MANUAL LEVERS

Mod.	N. of bins	A cm.	TYRES	F cm.	E cm.	 Capacity Kg.
Telescopic/4	4	500	10.075 15.3 - B=198	10-60	128	3000
Telescopic/5	5	600	31x15.50-15 - B=220	10-60	128	3000

TELESCOPIC TOP *Electronic* WITH ELECTRIC CONTROL

Mod.	N. of bins	A cm.	TYRES	F cm.	E cm.	 Capacity Kg.
Telescopic EL/4	4	500	10.075 15.3 - B=198	10-60	128	3000
Telescopic EL/5	5	600	31x15.50-15 - B=220	10-60	128	3000

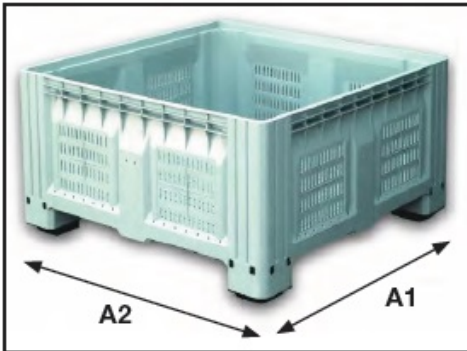

BIN DIMENSIONS

A1	A2
113	113
120	110
120	100
120	120
120	80 ON DEMAND

